Century®

SE Series

## STANDARD FEATURES:

- R410A chlorine-free refrigerant
- Energy-efficient compressor
- Internal protection against high temperature motor overload conditions
- High quality copper tube and aluminum fin condenser
- Service valves with sweat connections and easy-access gauge ports
- Factory-installed high pressure switch and low pressure switch
- AHRI certified and ETL listed
- Filter drier included

## CABINET FEATURES:

- Unique top design for sound control
- Compact design, easy installation, and transportation
- Powder-coated galvanized steel cabinet
- Wire fan grille
- Steel louver coil guard

For the latest AHRI system matches, please visit AHRIdirectory.org

# RSA15 SERIES

## SPLIT SYSTEM AIR CONDITIONER

**Up to 15.2 SEER2**

**Cooling Capacity: 18 - 60 kBtu/h**




AHRI CERTIFIED

ETL LISTED c US Intertek

Warranty–5 years on parts, 10 years on compressor
Ext. Warranty–10 years on parts, 10 years on compressor
(Some limitations apply; see printed warranty for details.)
www.century-hvac.com

R-410A

## MODEL NUMBER GUIDE

| R | S | A | 15 | 18 | S | 1 | A |
|---|---|---|---|---|---|---|---|
| Residential | Split | Air Conditioning | SEER 2 | Capacity BTUH x 1000 | SE Series | Power 1 = 208/230-1-60 | Revision Level |

## SPECIFICATIONS


| SPECIFICATIONS | RSA1518S1A | RSA1524S1A | RSA1530S1A | RSA1536S1A |
|---|---|---|---|---|
| **NOMINAL CAPACITY** | | | | |
| Cooling (BTU/h) | 18,000 | 24,000 | 30,000 | 36,000 |
| **ELECTRICAL DATA** | | | | |
| Voltage / Phase (60 Hz) | 208/230 / 1 | 208/230 / 1 | 208/230 / 1 | 208/230 / 1 |
| Min. / Max. Voltage | 187/253 | 187/253 | 187/253 | 187/253 |
| MCA | 11.6 | 14.6 | 15.8 | 21 |
| MOP | 15 | 20 | 25 | 35 |
| **COMPRESSOR** | | | | |
| Type | Rotary | Rotary | Rotary | Scroll |
| Stage | Single | Single | Single | Single |
| RLA | 8 | 10.4 | 11.4 | 15 |
| LRA | 35.0 | 43.0 | 58.0 | 75.0 |
| **CONDENSER COIL** | | | | |
| Type | Tube & Fin | Tube & Fin | Tube & Fin | Tube & Fin |
| Tube Size (O.D) | 3/16 | 3/16 | 3/16 | 3/16 |
| **FAN MOTOR** | | | | |
| Motor Type | ECM | ECM | ECM | ECM |
| Capacitor (uF) | / | / | / | / |
| Horsepower (HP) | 1-1/6 | 1-1/6 | 1-1/6 | 1-1/3 |
| Full Load Amps (FLA) | 1.6 | 1.6 | 1.6 | 2.2 |
| **REFRIGERATION SYSTEM** | | | | |
| Liquid Valve Size (O.D.) | 3/8 | 3/8 | 3/8 | 3/8 |
| Valve Size (O.D.) | 3/4 | 3/4 | 3/4 | 3/4 |
| Liquid Line Size (O.D.) | 3/8 | 3/8 | 3/8 | 3/8 |
| Suction Line Size (O.D.) | 3/4 | 3/4 | 3/4 | 3/4 |
| Refrigerant Charge (lbs. - oz.) | 4 lbs.-14 oz | 5 lbs.-12oz | 7 lbs.-5 oz | 5 lbs.-9 oz |
| Superheat (°F) | 9 °F | 9 °F | 9 °F | 9 °F |
| **OPERATION RANGE** | | | | |
| Cooling (°F) | 55-115 | 55-115 | 55-115 | 55-115 |
| Sound Power (dB) | 70 | 73 | 72 | 75 |

For the latest AHRI system matches,
please visit AHRIdirectory.org

| SPECIFICATIONS | RSA1542S1A | RSA1548S1A | RSA1560S1A |
|---|---|---|---|
| **NOMINAL CAPACITY** | | | |
| Cooling (BTU/h) | 42,000 | 48,000 | 60,000 |
| **ELECTRICAL DATA** | | | |
| Voltage / Phase (60 Hz) | 208/230 / 1 | 208/230 / 1 | 208/230 / 1 |
| Min. / Max. Voltage | 187/253 | 187/253 | 187/253 |
| MCA | 24.9 | 25.2 | 35.1 |
| MOP | 45 | 45 | 60 |
| **COMPRESSOR** | | | |
| Type | Scroll | Scroll | Scroll |
| Stage | Single | Single | Single |
| RLA | 18.1 | 18.4 | 26.3 |
| LRA | 112 | 94 | 127 |
| **CONDENSER COIL** | | | |
| Type | Tube & Fin | Tube & Fin | Micro-channel |
| Tube Size (O.D) | 3/16 | 3/16 | - |
| **FAN MOTOR** | | | |
| Motor Type | ECM | ECM | ECM |
| Capacitor (uF) | / | / | / |
| Horsepower (HP) | 1-1/3 | 1-1/3 | 1-1/3 |
| Full Load Amps (FLA) | 2.2 | 2.2 | 2.2 |
| **REFRIGERATION SYSTEM** | | | |
| Liquid Valve Size (O.D.) | 3/8 | 3/8 | 3/8 |
| Valve Size (O.D.) | 7/8 | 7/8 | 7/8 |
| Liquid Line Size (O.D.) | 3/8 | 3/8 | 3/8 |
| Suction Line Size (O.D.) | 7/8 | 7/8 | 1-1/8 |
| Refrigerant Charge (lbs. - oz.) | 8 lbs. - 1oz | 8 lbs. - 10oz | 7 lbs. - 14oz |
| Superheat (°F) | 9 °F | 9 °F | 9 °F |
| **OPERATION RANGE** | | | |
| Cooling (°F) | 55-115 | 55-115 | 55-115 |
| Sound Power (dB) | 75 | 76 | 77 |

# Century®

# SE Series

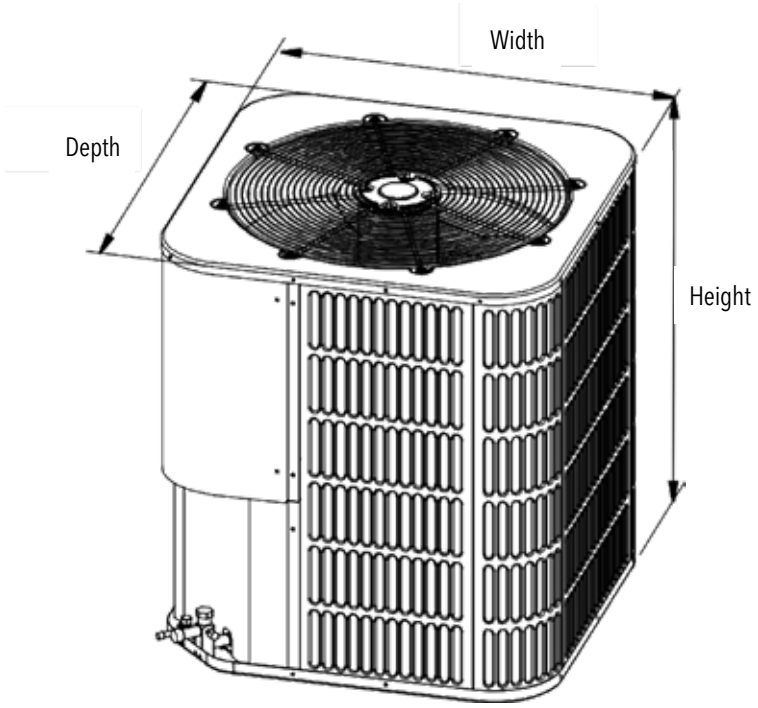


| | RSA1518S1A | RSA1524S1A | RSA1530S1A | RSA1536S1A | RSA1542S1A | RSA1548S1A | RSA1560S1A |
|---|---|---|---|---|---|---|---|
| **DIMENSIONS AND WEIGHTS** | | | | | | | |
| Height (in.) | 24-15/16 | 24-15/16 | 33-3/16 | 24-15/16 | 33-3/16 | 33-3/16 | 33-3/16 |
| Width (in.) | 23-5/8 | 28 | 28 | 29-1/8 | 29-1/8 | 29-1/8 | 29-1/8 |
| Depth (in.) | 23-5/8 | 28 | 28 | 29-1/8 | 29-1/8 | 29-1/8 | 29-1/8 |
| Weight (lbs.) | 117 | 132 | 156 | 154 | 191 | 191 | 194 |

| | Where Used | Kit # | Purpose |
|---|---|---|---|
| **System Accessories (indoor section)** | | | |
| TXV Kit | 18, 24, 30, 36 | TR6-3TONNB | TXV's provide superior refrigerant flow control, comfort and efficiency compared to pistons |
| | 42, 48 | TR6-4TON | |
| | 60 | TR6-5TON | |

"This product complies with all California product labeling laws including, but not limited to, the Safe Drinking Water and Toxic Enforcement Act of 1986, more commonly known as Proposition 65."

Due to ongoing product improvements, specifications and dimensions are subject to change and correction without notice or incurring obligations. Determining the application and suitability for use of any product is the responsibility of the installer. Additionally, the installer is responsible for verifying dimensional data on the actual product prior to beginning any installation preparations.

Third party incentive and rebate programs have precise requirements as to product performance and certification. All products meet applicable regulations in effect on date of manufacture; however, certifications are not necessarily granted for the life of a product. Therefore, it is the responsibility of the applicant to determine whether a specific model qualifies for these incentive/rebate programs.

1900 Wellworth Ave., Jackson MI 49203 • 517.787.2100
www.heatcontroller.com • www.century-hvac.com

HEAT CONTROLLER
Confidence in any climate
Century