



1900 Wellworth Ave. • Jackson, MI 49203
517-787-2100

Submittal Data

MODEL
PTAC12H150A-CY

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Reference:

PERFORMANCE DATA

Power supply	208/230V/60	
Cooling		
Capacity	Btu/h	11800/12000
Input	W	1060/1080
Rated current	A	5.5/6.1
EER	Btu/w	10.7

Heating		
Capacity	Btu/h	NA
Rated Input (elect. Heater)	W	4100/5000
Rated current	A	20.1/22.3
Max. Current	A	NA

Compressor Electrical		
Model	KSM100N11VEZ	
Type	ROTARY	
Brand	GMCC	
Capacitor	mF	35
Refrigerant type	oz	R32/15.17

Air flow & Noise level		
Indoor air flow	CFM	348/431
Indoor noise level	dB(A)	51.5/52
Outdoor noise level	dB(A)	67

Indoor Fan Motor		
Model	ZKFP-25-8-157L	
Input	W	70
Capacitor	uF	1.8
Speed(Hi/Lo)	rpm	1020/1110

Accessories	
Wall Sleeve-breakdown	7602-500F
Stamped Aluminum Grill	7602-501F
Architectural Aluminum Grill	7602-505F
Colored Polymer Grills	See Catalog
Indoor Discharge Air Deflector	7602-508F
Wireless Wall Thermostat	7602-536A




FRESH AIR (85 CFM)

Outdoor Coil		
Outdoor Fan Motor		
Model	YKT-58-4-3L	
Input	W	87
Speed	RPM	1580

Dimensional Data		
Dimension(W*H*D)	inch	42.01x15.98x20.94
Packing (W*H*D)	inch	44.49x19.29x24.61
Net/Gross weight	lbs.	103.62/112.43

System Data	
Design pressure	300/580 PSIG
Remote Controller	
Thermostat type	On-Board
Wired Thermostat	

Cord and Plug		
Cord Length	ft.	6.5
Plug Face	Nema	6-30P

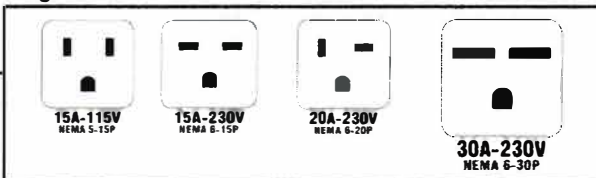

Subbase (no receptacle)	7602-509F
Drain Kit	7602-506F
Duct Kit	7602-511F
Universal Remote	7602-512
Thermostat Locking Cover	7602-535